


G593-SD0-AAX1

HPC Server - 5U DP SXM5 H100 8-GPU

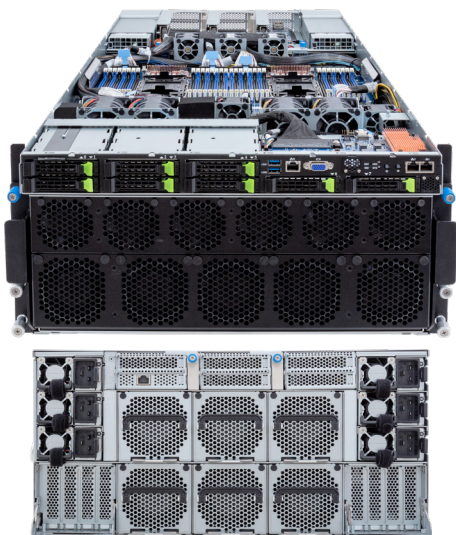

Features

- Supports NVIDIA HGX™ H100 with 8 x SXM5 GPUs
- Supports NVIDIA® NVLink® and NVSwitch™ technology
- Up to 900GB/s GPU to GPU interconnection
- 4th Gen Intel® Xeon® Scalable Processors
- Intel® Xeon® CPU Max Series
- Dual processor, LGA 4677
- 8-Channel RDIMM DDR5, 32 x DIMMs
- Dual ROM Architecture supported
- 2 x 10Gb/s BASE-T LAN ports
- 1 x dedicated management port
- 8 x 2.5" Gen5 NVMe/SATA hot-swappable bays
- 12 x LP PCIe Gen5 x16 slots
- 1 x LP PCIe Gen4 x16 slot
- 4+2 3000W (240V) 80+ Titanium redundant power supplies

Specification

| | | | |
|------------------------|--|-----------------------------|--|
| Dimensions | 5U (W447 x H222.25 x D945 mm) | Rear I/O | 1 x MLAN |
| Motherboard | MSB3-G40 | Backplane I/O | PCIe Gen5 x4 or SATA 6Gb/s or SAS 12Gb/s |
| CPU | 4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Intel® Xeon® Platinum Processor, Intel® Xeon® Gold Processor, Intel® Xeon® Silver Processor CPU TDP up to 350W | TPM | 1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010) |
| Socket | 2 x LGA 4677 (Socket E) | Power Supply | 4+2 3000W 80 PLUS Titanium redundant power supply AC Input: 115-240V |
| Chipset | Intel® C741 Chipset | System Management | Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X) |
| Memory | 8-Channel DDR5 memory, 32 x DIMM slots RDIMM modules up to 128GB supported 3DS RDIMM modules up to 256GB supported Memory speed: Up to 4800 MHz (1DPC), 4400 MHz (2DPC) | OS Compatibility | Windows Server 2019 / 2022 RHEL 8.4 / 8.5 / 8.6 / 8.7 / 9.0 / 9.1 (x64) SLES 15 SP3 / 15 SP4 (x64) Ubuntu 22.04 LTS / 22.04.1 LTS (x64) VMware ESXi 7.0 Update 3i / 8.0 Citrix Hypervisor 8.2.1 |
| LAN | 2 x 10Gb/s BASE-T LAN ports (Intel® X710-AT2) Supported NCSI function 1 x 10/100/1000 management LAN | System Fans | Front: 5 x 80x80x80mm (17,000rpm), 6 x 60x60x76mm (21,700rpm) Rear: 6 x 80x80x80mm (17,000rpm), 3 x 40x40x56mm (29,700rpm) Internal: 6 x 40x40x28mm (25,000rpm)/4 x 60x60x56mm (24,000rpm) |
| Video | Integrated in Aspeed AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM | Operating Properties | Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing) |
| Storage | 8 x 2.5" Gen5 NVMe/SATA/SAS hot-swappable HDD/SSD bays SAS card is required for SAS devices support | Packaging Content | 1 x G593-SD0, 2 x CPU heatsinks, 6 x Carrier clips, 1 x Rail kit |
| RAID | Intel® SATA RAID 0/1/10/5 | Reference Numbers | System with NVIDIA module: 6NG593SD0DR000AAX1* - Rail kit: 25HB2-A96102-K0R - CPU heatsink: 25ST1-24320H-M1R - Power supply: 25EP0-23000A-D0S - C19 power cord 125V/15A (US): 25CP1-018000-Q0R (optional) - C19 power cord 250V/16A (EU): 25CP3-01830H-Q0R (optional) |
| Expansion Slots | Supports NVIDIA HGX™ H100 with 8 x SXM5 GPU 12 x PCIe Gen5 x16 low-profile slots 1 x PCIe Gen4 x16 low-profile slot | | |
| Front I/O | 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default port) | | |



Learn more about GIGABYTE server, visit <https://www.gigacomputing.com>

- * All specifications are subject to change without notice. Please visit our website for the latest information.
- * Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
- * NVIDIA, the NVIDIA logo, and NVIDIA HGX are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. All other brands, logos and names are property of their respective owners.

© 2023 Giga Computing Technology Co., Ltd. All rights reserved.

Engineered by

